

Z-TRANSFORM

The z-transform of a sequence $x[n]$ is

$$X(z) = \sum_{n=-\infty}^{\infty} x[n]z^{-n}.$$

The z-transform can also be thought of as an operator $\mathcal{Z}\{\cdot\}$ that transforms a sequence to a function:

$$\mathcal{Z}\{x[n]\} = \sum_{n=-\infty}^{\infty} x[n]z^{-n} = X(z).$$

The Fourier transform does not converge for all sequences—the infinite sum may not always be finite. Similarly, the z-transform does not converge for all sequences or for all values of z . The set of values of z for which the z-transform converges is called the region of convergence (ROC).


The z-transform therefore exists (or converges) if

$$X(z) = \sum_{n=-\infty}^{\infty} |x[n]r^{-n}| < \infty.$$

This leads to the condition

$$\sum_{n=-\infty}^{\infty} |x[n]| |z|^{-n} < \infty$$

for the existence of the z-transform. The ROC therefore consists of a ring in the z-plane:

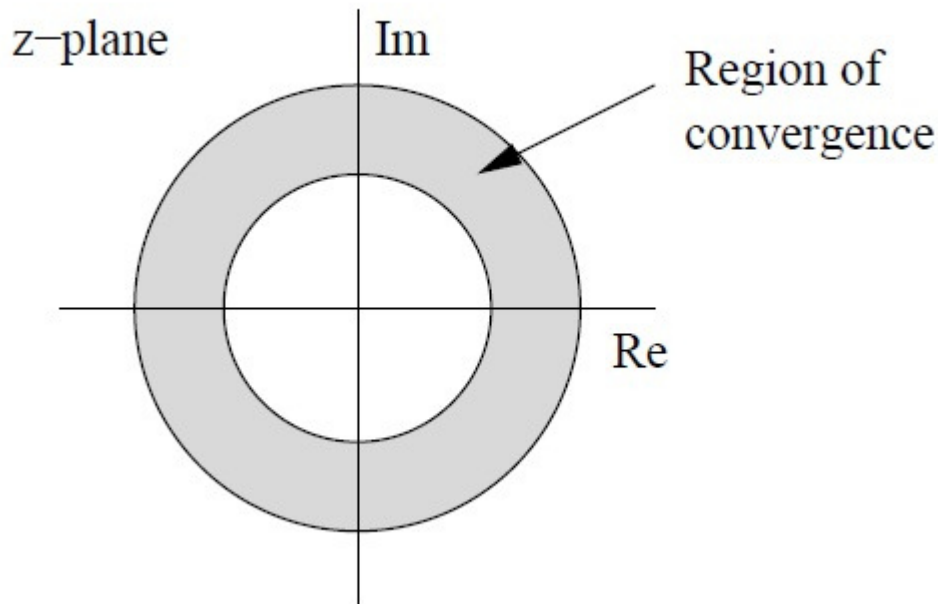

The inner radius of this ring may include the origin, and the outer radius may extend to infinity. If the ROC includes the unit circle $|z| = 1$, then the Fourier transform will converge.

PROPERTIES OF THE REGION OF CONVERGENCE

The properties of the ROC depend on the nature of the signal. Assuming that the signal has a finite amplitude and that the z-transform is a rational function:

- The ROC is a ring or disk in the z-plane, centered on the origin

$$(0 \leq r_R < |z| < r_L \leq \infty).$$

- The Fourier transform of $x[n]$ converges absolutely if and only if the ROC of the z-transform includes the unit circle.
- The ROC cannot contain any poles.
- If $x[n]$ is finite duration (ie. zero except on finite interval

$$-\infty < N_1 \leq n \leq N_2 < \infty),$$

then the ROC is the entire z-plane except perhaps at $z = 0$ or $z = \infty$.

- If $x[n]$ is a right-sided sequence then the ROC extends outward from the

outermost finite pole to infinity.

- If $x[n]$ is left-sided then the ROC extends inward from the innermost nonzero pole to $z = 0$.
- A two-sided sequence (neither left nor right-sided) has a ROC consisting of a ring in the z -plane, bounded on the interior and exterior by a pole (and not containing any poles).
- The ROC is a connected region.

PROPERTIES OF Z-TRANSFORM

Linearity:

$$\text{If } x(n) \xleftrightarrow{\text{Z.T}} X(Z)$$

$$\text{and } y(n) \xleftrightarrow{\text{Z.T}} Y(Z)$$

Then linearity property states that

$$a x(n) + b y(n) \xleftrightarrow{\text{Z.T}} a X(Z) + b Y(Z)$$

Timeshifting:

The time-shifting property is as follows:

$$x[n - n_0] \xleftrightarrow{\text{Z}} z^{-n_0} X(z), \quad \text{ROC} = R_x.$$

Proof:

$$\begin{aligned} Y(z) &= \sum_{n=-\infty}^{\infty} x[n - n_0] z^{-n} = \sum_{m=-\infty}^{\infty} x[m] z^{-(m+n_0)} \\ &= z^{-n_0} \sum_{m=-\infty}^{\infty} x[m] z^{-m} = z^{-n_0} X(z). \end{aligned}$$

Differentiation:

The differentiation property states that

$$nx[n] \xleftrightarrow{\mathcal{Z}} -z \frac{dX(z)}{dz}, \quad \text{ROC} = R_x.$$

Proof:

$$X(z) = \sum_{n=-\infty}^{\infty} x[n]z^{-n},$$

we have

$$-z \frac{dX(z)}{dz} = -z \sum_{n=-\infty}^{\infty} (-n)x[n]z^{-n-1} = \sum_{n=-\infty}^{\infty} nx[n]z^{-n} = \mathcal{Z}\{nx[n]\}.$$

Conjugation:

$$x^*[n] \xleftrightarrow{\mathcal{Z}} X^*(z^*), \quad \text{ROC} = R_x.$$

Convolution Property:

$$\text{If } x(n) \xleftrightarrow{\text{Z.T}} X(Z)$$

and

$$y(n) \xleftrightarrow{\text{Z.T}} Y(Z)$$

Then convolution property states that

$$x(n) * y(n) \xleftrightarrow{\text{Z.T}} X(Z) \cdot Y(Z)$$

Correlation Property:

$$\text{If } x(n) \xleftrightarrow{\text{Z.T}} X(Z)$$

$$\text{and } y(n) \xleftrightarrow{\text{Z.T}} Y(Z)$$

Then convolution property states that

$$x(n) * y(n) \xleftrightarrow{\text{Z.T}} X(Z) \cdot Y(Z)$$

Initial Value and Final Value Theorems

Initial value and final value theorems of z-transform are defined for causal signal.

Initial Value Theorem

For a causal signal $x(n)$ the initial value theorem states that

$$x(0) = \lim_{z \rightarrow \infty} X(z)$$

This is used to find the initial value of the signal without taking inverse z-transform

Final Value Theorem

For a causal signal $x(n)$, the final value theorem states that

$$x(\infty) = \lim_{z \rightarrow 1} [z - 1] X(z)$$

This is used to find the final value of the signal without taking inverse z-transform.