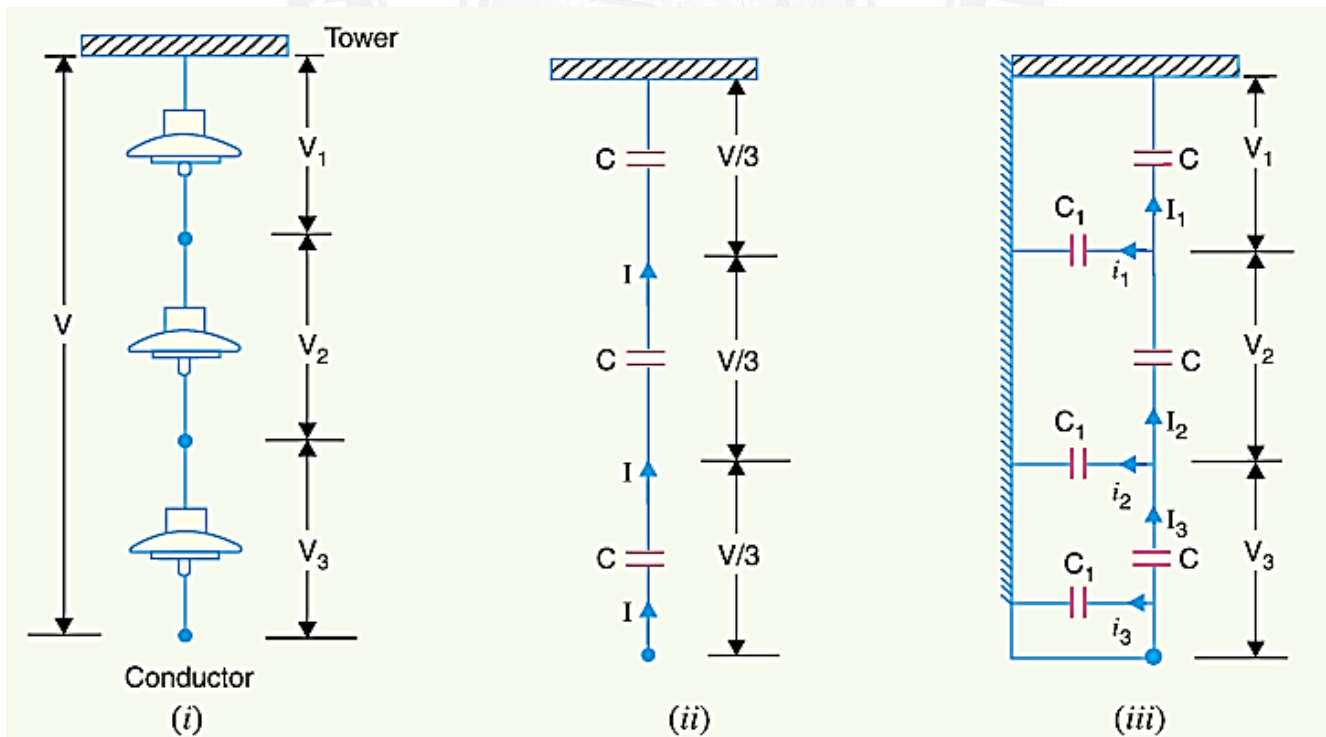


### 3.5 POTENTIAL DISTRIBUTION OVER SUSPENSION INSULATOR STRING

A string of suspension insulators consists of a number of porcelain discs connected in series through metallic links. Fig. shows 3-disc string of suspension insulators. The porcelain portion of each disc is in between two metal links. Therefore, each disc forms a capacitor  $C$  as shown in Fig. This is known as mutual capacitance or self-capacitance. If there were mutual capacitance alone, then charging current would have been the same through all the discs and consequently voltage across each unit would have been the same i.e.,  $V/3$  as shown. However, in actual practice, capacitance also exists between metal fitting of each disc and tower or earth. This is known as shunt capacitance  $C_1$ . Due to shunt capacitance, charging current is not the same through all the discs of the string. Therefore, voltage across each disc will be different. Obviously, the disc nearest to the line conductor will have the maximum voltage. Thus referring to Fig  $V_3$  will be much more than  $V_2$  or  $V_1$ .



**Figure 3.1 Potential Distribution**

[Source: "Principles of Power System" by V.K.Mehta Page: 168]

The following points may be noted regarding the potential distribution over a string of suspension insulators:

- The voltage impressed on a string of suspension insulators does not distribute itself uniformly across the individual discs due to the presence of shunt capacitance.
- The disc nearest to the conductor has maximum voltage across it. As we move towards the cross-arm, the voltage across each disc goes on decreasing.
- The unit nearest to the conductor is under maximum electrical stress and is likely to be punctured. Therefore, means must be provided to equalize the potential across each unit.
- If the voltage impressed across the string were d.c., then voltage across each unit would be the same. It is because insulator capacitances are ineffective for d.c.

