

DESIGN OF FIR FILTERS-SYMMETRIC AND ANTI-SYMMETRIC FIR FILTERS

Introduction:

- A digital filter is just a filter that operates on the digital signals.

Types:

- FIR filter design
- IIR filter design

FIR filter:

The digital filter which is designed using a finite number of response coefficients is called as finite impulse response filters, $h_0(n), h_1(n), \dots, h_{(N-1)}(n)$

Advantages:

1. FIR filters have exact linear phase.
2. FIR filters are always stable.
3. FIR filters can be realized in both recursive and non-recursive structure.
4. FIR filters with any arbitrary magnitude response can be tackled using FIR sequence.

Disadvantages:

1. For the same filter specification the order of the FIR filter design can be as high as 5 to 10 times that of an IIR filter.
2. Large storage requirement needed.
3. Powerful computational facilities required for the implementation.

Linear Phase (LP) FIR Filters:

Derive the condition for Linear Phase (LP) FIR Filters. [Nov/Dec-2009]

The transfer function of a FIR causal filter is given by

$$H(z) = \sum_{n=0}^{N-1} h(n)z^{-n}$$

Where $h(n)$ is the impulse response of the filter.

The Fourier transform of $h(n)$ is

$$H(e^{j\omega}) = \sum_{n=0}^{N-1} h(n)e^{-j\omega n},$$

Which is periodic in frequency with period 2π .

$$H(e^{j\omega}) = \pm |H(e^{j\omega})| e^{-j\theta(\omega)}$$

Where $H(e^{j\omega})$ is magnitude response and $\theta(\omega)$ is phase response.

We define the phase delay and group delay of a filter as

$$\tau_p = \frac{-\theta(\omega)}{\omega} \text{ and } \tau_g = \frac{-d\theta(\omega)}{d\omega} \quad >(1)$$

For FIR filters with linear phase we can define

$$\theta(\omega) = -\alpha\omega; -\pi \leq \omega \leq \pi \quad >(2)$$

Where α is a constant phase delay in samples.

Substitute: equation 2 in 1, we have $\tau_p = \tau_g = \alpha$, which means that α is independent of frequency. We can write,

$$\sum_{n=0}^{N-1} h(n)e^{-j\omega n} = \pm |H(e^{j\omega})| e^{-j\theta(\omega)}$$

Which gives us,

$$\sum_{n=0}^{N-1} h(n) \cos \omega n = \pm |H(e^{j\omega})| \cos \theta(\omega) \quad >(3)$$

and

$$-\sum_{n=0}^{N-1} h(n) \sin \omega n = \pm |H(e^{j\omega})| \sin \theta(\omega) \quad \text{---(4)}$$

By taking ratio of equation (3) to equation (4), we obtain

$$\frac{\sum_{n=0}^{N-1} h(n) \sin \omega n}{\sum_{n=0}^{N-1} h(n) \cos \omega n} = \frac{\sin \alpha \omega}{\cos \alpha \omega}; [\theta(\omega) = -\alpha \omega] \quad \text{---(5)}$$

After simplifying equation (5) we have

$$\sum_{n=0}^{N-1} h(n) \sin(\alpha - n)\omega = 0 \quad \text{---(6)}$$

Equation (6) will be zero when

$$h(n) = h(N-1-n) \quad \text{---(7)}$$

And $\alpha = \frac{N-1}{2} \quad \text{---(8)}$

Therefore, FIR filters will have constant phase and group delays when the impulse response is symmetrical about $\alpha = \frac{N-1}{2}$

The impulse response satisfying equation (7) & (8) for odd and even values of N. When N=7 the centre of symmetry of the sequence occurs at third sample and when N=6, the filter delay is $\frac{1}{2}$ samples.

If only constant group delay is required, and not the phase delay we can write

$$\theta(\omega) = \beta - \alpha \omega$$

Now we have $H(e^{j\omega}) = \pm |H(e^{j\omega})| e^{j(\beta - \alpha \omega)}$

Equation (9) can be expressed as

$$\sum_{n=0}^{N-1} h(n) e^{-j\omega n} = \pm |H(e^{j\omega})| e^{j(\beta - \alpha \omega)} \quad \text{---(9)}$$

which gives us

$$\sum_{n=0}^{N-1} h(n) \cos \omega n = \pm |H(e^{j\omega})| \cos(\beta - \alpha \omega) \quad \text{---(10)}$$

and $-\sum_{n=0}^{N-1} h(n) \sin \omega n = \pm |H(e^{j\omega})| \sin(\beta - \alpha \omega) \quad \text{---(11)}$

By taking ratio of equation (11) to (10), we get

$$\frac{-\sum_{n=0}^{N-1} h(n) \sin \omega n}{\sum_{n=0}^{N-1} h(n) \cos \omega n} = \frac{\sin(\beta - \alpha \omega)}{\cos(\beta - \alpha \omega)}$$

From which we obtain

$$\sum_{n=0}^{N-1} h(n) \sin[\beta - (\alpha - n)\omega] = 0 \quad \text{---(12)}$$

If $\beta = \frac{\pi}{2}$, Equation (12) becomes,

$$\sum_{n=0}^{N-1} h(n) \cos(\alpha - n)\omega = 0 \quad \text{---(13)}$$


The equation 13 will be satisfied when $h(n) = h(N-1-n)$

And $\alpha = \frac{N-1}{2}$

Therefore, FIR filters have constant group delay, τ_g and not constant phase delay when the impulse response is anti-symmetrical about $\alpha = \frac{N-1}{2}$.

Example:

For $N=6$ $\alpha = \frac{N-1}{2} = \frac{6-1}{2} = 2 \frac{1}{2}$ (centre of symmetry)

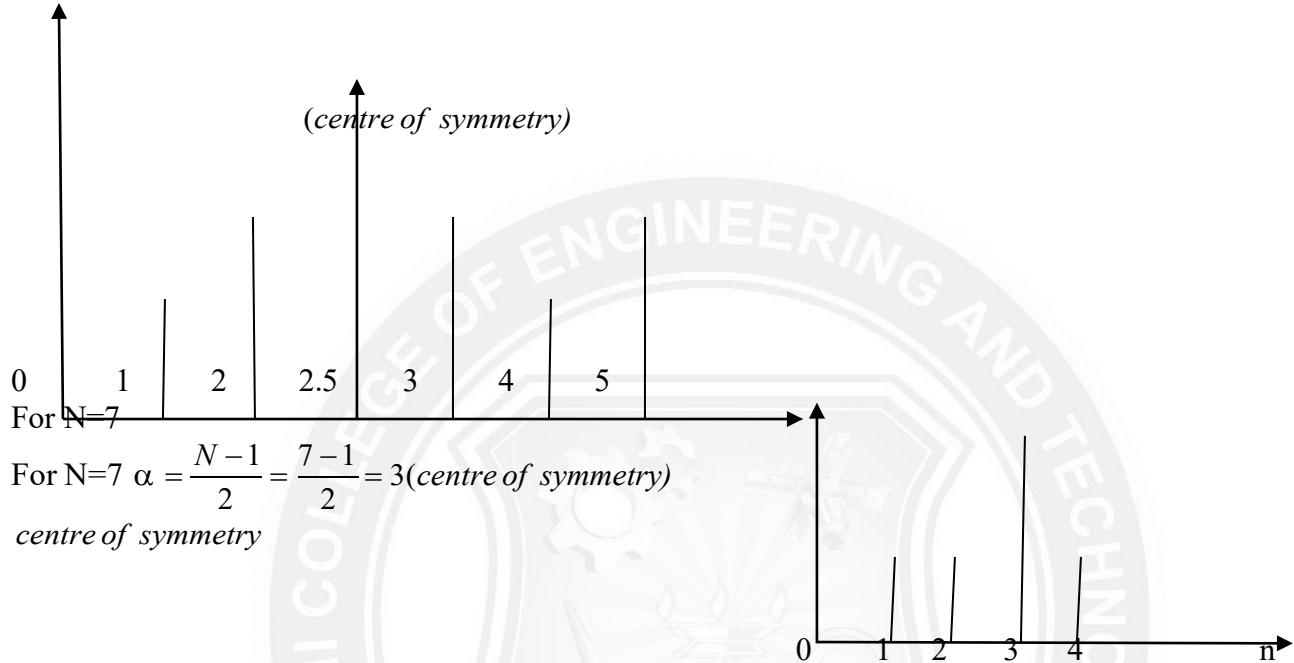

Linear Phase FIR Filter:

An FIR filter has linear phase if its unit sample response satisfies the condition

$$h(n) = \pm h(M-1-n); \quad n = 0, 1, 2, \dots, N-1$$

Case (i): Symmetric impulse response for "N is ODD":

Determine the frequency response of FIR filter with symmetric impulse response and the order of the filter is "N is Odd".

The frequency response of impulse response can be written as,

$$H(e^{j\omega}) = \sum_{n=0}^{\frac{M-1}{2}} h(n)e^{-j\omega n} + h\left(\frac{M-1}{2}\right)e^{-j\omega\left(\frac{M-1}{2}\right)} + \sum_{n=\frac{N+1}{2}}^{M-1} h(n)e^{-j\omega n} \quad (1)$$

Let $n = M-1-n$, where $z = e^{j\omega}$ $|H(e^{j\omega})| = H(z)|z = e^{j\omega}$

$$H(e^{j\omega}) = \sum_{n=0}^{\frac{M-1}{2}} h(n)e^{-j\omega n} + h\left(\frac{M-1}{2}\right)e^{-j\omega\left(\frac{M-1}{2}\right)} + \sum_{n=0}^{\frac{M-3}{2}} h(M-1-n)e^{-j\omega(M-1-n)} \quad (2)$$

For a symmetrical impulse response, $h(n) = h(M-1-n)$, substituting this relation in above equation (2)

$$H(e^{j\omega}) = e^{-j\omega\left(\frac{M-1}{2}\right)} \left[\sum_{n=0}^{\frac{M-3}{2}} h(n)e^{j\omega\left(\frac{M-1}{2}-n\right)} + \sum_{n=0}^{\frac{M-1}{2}} h(n)e^{-j\omega\left(\frac{M-1}{2}-n\right)} + h\left(\frac{M-1}{2}\right) \right]$$

$$H(e^{j\omega}) = e^{-j\omega\left(\frac{M-1}{2}\right)} \left[\sum_{n=0}^{\frac{M-3}{2}} n(n) \cos\omega \left(\frac{M-1}{2} - n \right) + h\left(\frac{M-1}{2}\right) \right]$$

The polar form of $H(e^{j\omega})$ can be expressed as

$$H(e^{j\omega}) = |H(e^{j\omega})| e^{j\angle H(e^{j\omega})}$$

\therefore Magnitude of $H(e^{j\omega})$ is given as

$$H(e^{j\omega}) = h\left(\frac{M-1}{2}\right) + 2\sum_{n=0}^{\frac{M-2}{2}} h(n) \cos\omega \left(\frac{M-1}{2} - n\right)$$

$$\text{for } H(e^{j\omega}) > 0$$

Angle of $H(e^{j\omega})$ is given as

$$\angle H(e^{j\omega}) = \begin{cases} \frac{\pi}{2} & \text{for } H(e^{j\omega}) > 0 \\ \frac{M^2-1}{2} + \pi & \text{for } H(e^{j\omega}) < 0 \end{cases}$$

Case (ii) : Symmetric Impulse Response For –“N is EVEN”:

Determine the frequency response of FIR filter with symmetric impulse response and the order of the filter N is Even. [Nov/Dec-2013]

The frequency response of impulse response can be written as,

$$H(e^{j\omega}) = \sum_{n=0}^{\frac{M-2}{2}} h(n)e^{-j\omega n} + \sum_{n=0}^{\frac{M-2}{2}} h(n)e^{-j\omega n} \quad \dots \quad (1)$$

Let $n = M - 1 - n$, where $z = e^{j\omega}$ $|H(e^{j\omega})| = H(z)|z = e^{j\omega}$

$$H(e^{j\omega}) = \sum_{n=0}^{\frac{M-2}{2}} h(n)e^{-j\omega n} + \sum_{n=0}^{\frac{M-2}{2}} h(M-1-n)e^{-j\omega(M-1-n)} \quad \dots \quad (2)$$

For a symmetrical impulse response, $h(n) = h(M-1-n)$, substituting this relation in aboveequation(2)

$$H(e^{j\omega}) = \sum_{n=0}^{\frac{M-2}{2}} h(n)e^{-j\omega n} + h\left(\frac{M-1}{2}\right) e^{-j\omega\left(\frac{M-1}{2}\right)} + \sum_{n=0}^{\frac{M-1}{2}} h(n)e^{-j\omega n}$$

$$H(e^{j\omega}) = e^{-j\omega\left(\frac{M-1}{2}\right)} \left[\sum_{n=0}^{\frac{M-2}{2}} h(n)e^{j\omega\left(\frac{M-1}{2} - n\right)} + \sum_{n=0}^{\frac{M-2}{2}} h(n)e^{-j\omega\left(\frac{M-1}{2} - n\right)} \right]$$

$$H(e^{j\omega}) = e^{-j\omega\left(\frac{M-1}{2}\right)} \left[\sum_{n=0}^{\frac{M-2}{2}} h(n) \cos\omega \left(\frac{M-1}{2} - n\right) \right]$$

The polar form of $H(e^{j\omega})$ can be expressed as $H(e^{j\omega}) = |H(e^{j\omega})|e^{j\angle H(e^{j\omega})}$

$$\therefore \text{Magnitude } H(e^{j\omega}) = 2\sum_{n=0}^{\frac{M-2}{2}} h(n) \cos\omega \left(\frac{M-1}{2} - n\right)$$

$$\text{for } H(e^{j\omega}) > 0$$

Angle of $H(e^{j\omega})$ is given as $\angle H(e^{j\omega}) = \begin{cases} \frac{\pi}{2} & \text{for } H(e^{j\omega}) > 0 \\ \frac{M^2-1}{2} + \pi & \text{for } H(e^{j\omega}) < 0 \end{cases}$

Case (iii) : Antisymmetric for “N is ODD”:

Determine the frequency response of FIR filter with Antisymmetric impulse response and the order of the filter N is Odd.

For this type of sequence

$$h\left(\frac{M-1}{2}\right) = 0$$

$$H(e^{j\omega}) = \sum_{n=0}^{M-1} h(n)e^{-j\omega n}$$

The frequency response of impulse response can be written as,

$$H(e^{j\omega}) = \sum_{n=0}^{\frac{M-3}{2}} h(n)e^{-j\omega n} + \sum_{n=0}^{\frac{M-3}{2}} h(M-1-n)e^{-j\omega(M-1-n)}$$

for antisymmetric impulse response, $h(n) = -h(M-1-n)$

$$\begin{aligned} H(e^{j\omega}) &= \sum_{n=0}^{\frac{M-3}{2}} h(n)e^{-j\omega n} - \sum_{n=0}^{\frac{M-3}{2}} h(n)e^{-j\omega(M-1-n)} \\ &= e^{-j\omega\left(\frac{M-1}{2}\right)} \left[\sum_{n=0}^{\frac{M-3}{2}} h(n)e^{-j\omega\left(\frac{M-1}{2}\right)} - \sum_{n=0}^{\frac{M-3}{2}} h(n)e^{-j\omega\left(\frac{M-1}{2}\right)} \right] \\ &= e^{-j\omega\left(\frac{M-1}{2}\right)} j \left[2 \sum_{n=0}^{\frac{M-3}{2}} h(n) \sin \omega \left(\frac{M-1}{2} - n \right) \right] \\ &= e^{-j\omega\left(\frac{M-1}{2}\right)} e^{j\frac{\pi}{2}} \left[2 \sum_{n=0}^{\frac{M-3}{2}} h(n) \sin \omega \left(\frac{M-1}{2} - n \right) \right] \\ H(e^{j\omega}) &= e^{-j\omega\left(\frac{M-1}{2}\right)} \left[2 \sum_{n=0}^{\frac{M-3}{2}} h(n) \sin \omega \left(\frac{M-1}{2} - n \right) \right] \end{aligned}$$

Magnitude of $H(e^{j\omega})$ is given as,

$$|H(e^{j\omega})| = 2 \sum_{n=0}^{\frac{M-3}{2}} h(n) \sin \omega \left(\frac{M-1}{2} - n \right)$$

Angle of $H(e^{j\omega})$ is given as,

$$\angle H(e^{j\omega}) = \begin{cases} \frac{2\pi}{M-1} & \text{for } H(e^{j\omega}) > 0 \\ \frac{2\pi}{M-1} & \text{for } H(e^{j\omega}) < 0 \end{cases}$$

Case (iv) : Antisymmetric For –“N is EVEN”:

Determine the frequency response of FIR filter with Antisymmetric impulse response and the order of the filter N is Even. [Nov/Dec-2013]

The frequency response of impulse response can be written as,

$$H(e^{j\omega}) = \sum_{n=0}^{\frac{M-2}{2}} h(n)e^{-j\omega n} + \sum_{n=0}^{\frac{M-2}{2}} h(M-1-n)e^{-j\omega(M-1-n)}$$

for antisymmetric impulse response, $h(n) = -h(M-1-n)$

$$\begin{aligned} H(e^{j\omega}) &= \sum_{n=0}^{\frac{M-2}{2}} h(n)e^{-j\omega n} - \sum_{n=0}^{\frac{M-2}{2}} h(n)e^{-j\omega(M-1-n)} \\ &= e^{-j\omega\left(\frac{M-1}{2}\right)} j \left[2 \sum_{n=0}^{\frac{M-2}{2}} h(n) \sin \omega \left(\frac{M-1}{2} - n \right) \right] \end{aligned}$$

$$\begin{aligned}
H(e^{j\omega}) &= e^{-\frac{(M-1)}{2}\pi} \left[\sum_{n=0}^{\frac{M-2}{2}} h(n) \sin \omega \left(\frac{\frac{M-1}{2} - n}{2} \right) \right] \\
H(e^{j\omega}) &= e^{-\frac{(M-1)}{2}\pi} \left[2 \sum_{n=0}^{\frac{M-2}{2}} h(n) \sin \omega \left(\frac{M-1}{2} - n \right) \right] \\
&= e^{-j\omega \left(\frac{M-1}{2} \right)} \left[2 \sum_{n=0}^{\frac{M-2}{2}} h(n) \sin \omega \left(\frac{\frac{M-1}{2} - n}{2} \right) \right] \\
&= e^{j\left(\frac{\pi}{2} - \omega\right) \frac{M-1}{2}} \left[2 \sum_{n=0}^{\frac{M-2}{2}} h(n) \sin \omega \left(\frac{M-1}{2} - n \right) \right]
\end{aligned}$$

Magnitude of $H(e^{j\omega})$ is given as,

$$\begin{aligned}
H(e^{j\omega}) &= \left| \sum_{n=0}^{\frac{M-2}{2}} h(n) \sin \omega \left(\frac{\frac{M-1}{2} - n}{2} \right) \right| \\
&\quad \text{for } H(e^{j\omega}) > 0 \\
\angle H(e^{j\omega}) &= \begin{cases} \frac{2\pi}{M-1} & \text{for } H(e^{j\omega}) < 0 \\ \frac{\pi}{2} & \text{for } H(e^{j\omega}) > 0 \end{cases}
\end{aligned}$$

Angle of $H(e^{j\omega})$ is given as,